


LOVATO N | PRODUCT DATA SHEET

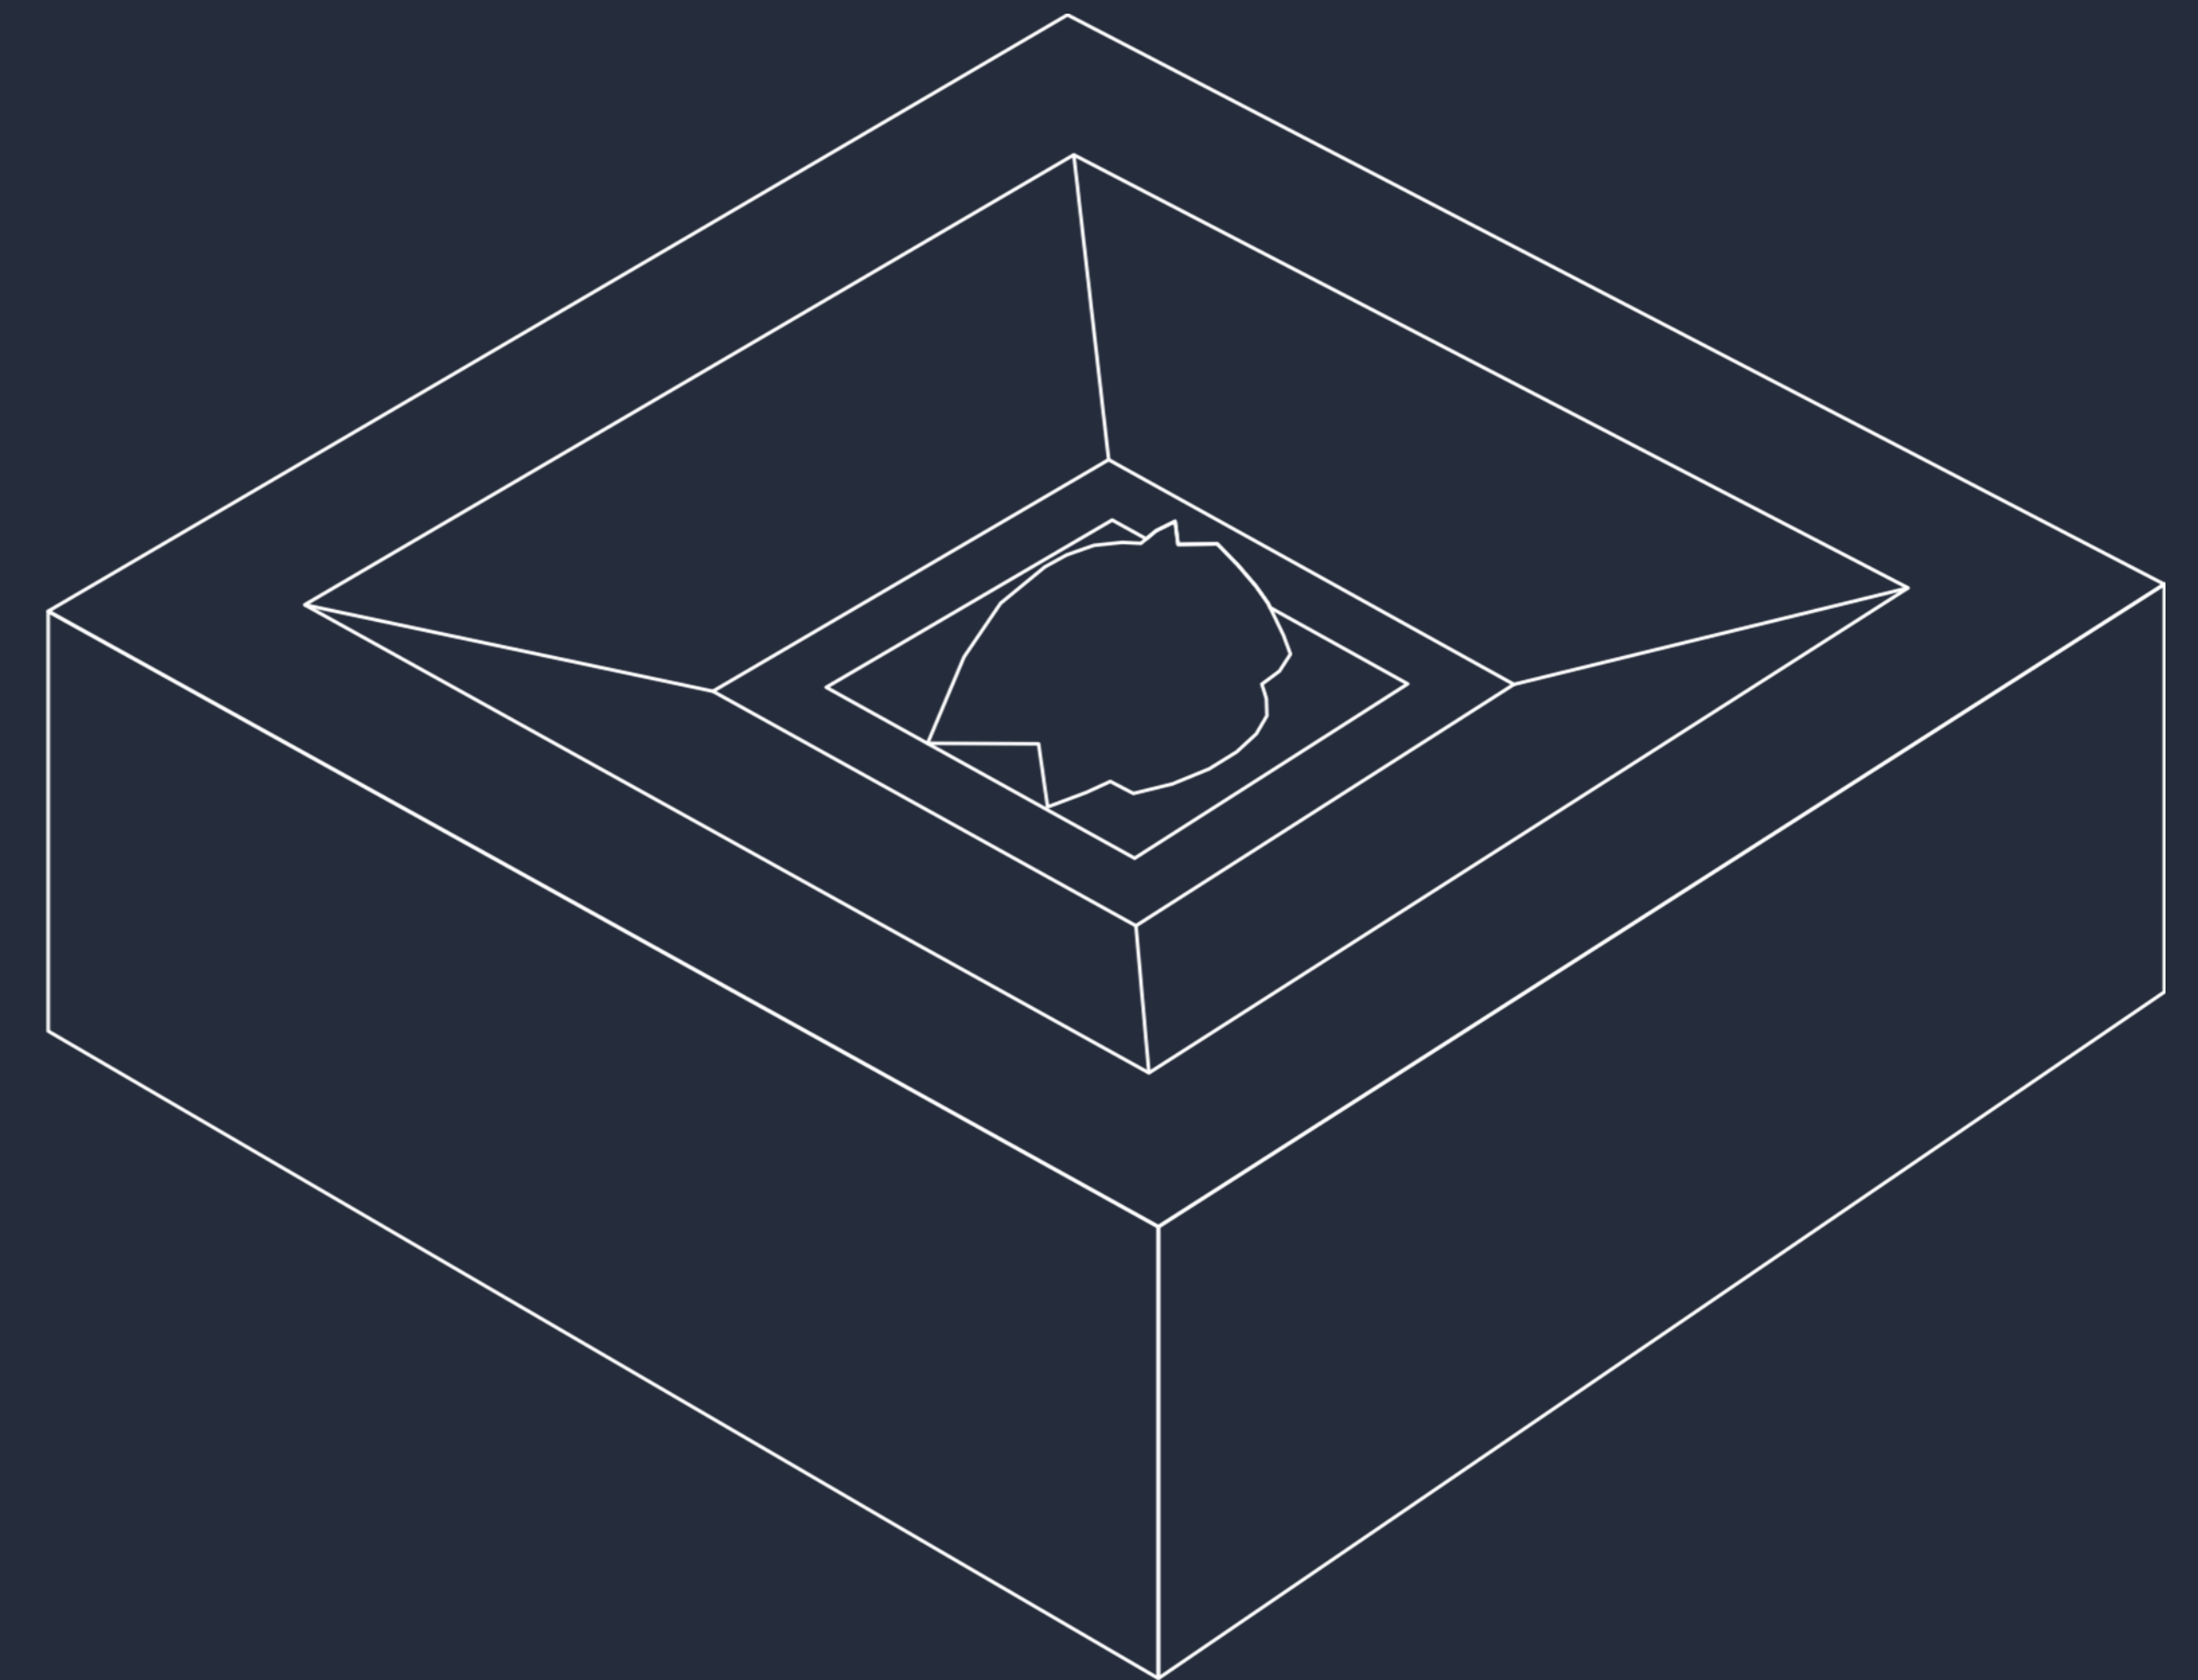

LOVATO N

MATERIALS:

white, grey or black polycarbonate body

MOUNTING:

surface on the ceiling

POWER SUPPLY:

self contained – 220-240 VAC / 50-60 Hz

central battery – 220-240 VAC / 50-60 Hz; 176-275 VDC

low voltage central battery – 24 VDC

LIGHT SOURCE:

1W power LED or 3W power LED

C - corridor lens; O - open area lens;

O 1W	120lm	C 1W	115lm
O 3W	250lm	C 3W	240lm

CHARGING:

max 12h; energy saving electronic impulse charger

AUTONOMY & BATTERIES:

1h, 2h or 3h; NiMH maintained-free batteries

INSULATION CLASS:

II

III – low voltage central battery

IP RATING:

IP41

AMBIENT TEMPERATURE:

t_a: 0°C – 40°C

OPTIONS:

AT – auto test; RS – RUBIC central monitoring;

CB – central battery; FZLV low voltage central battery;




ADDITIONAL INFO:

network power supply and battery charge LED indicator;

deep discharge protection;



SELECT COLOR:

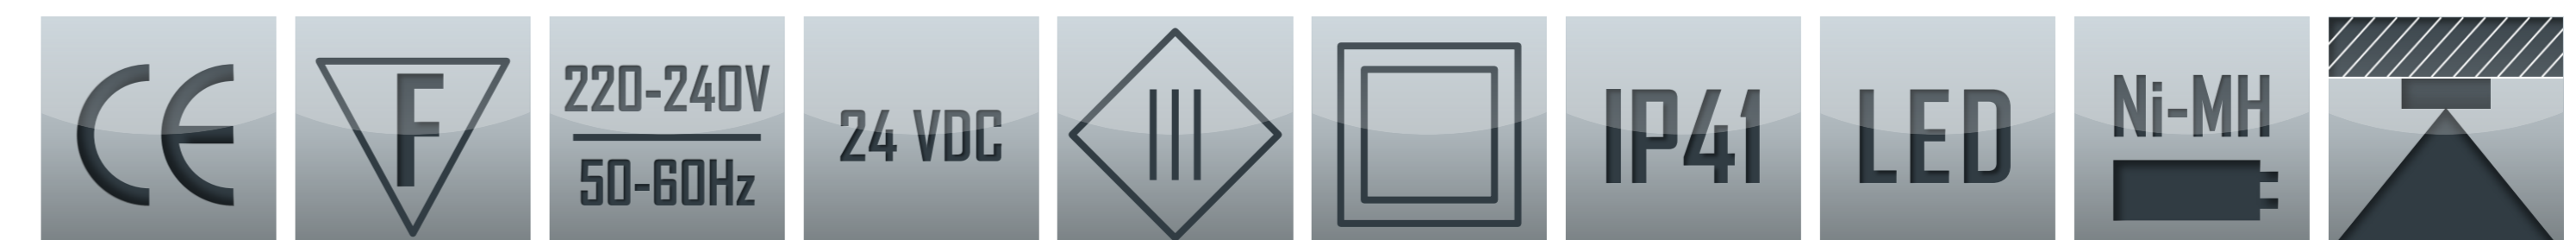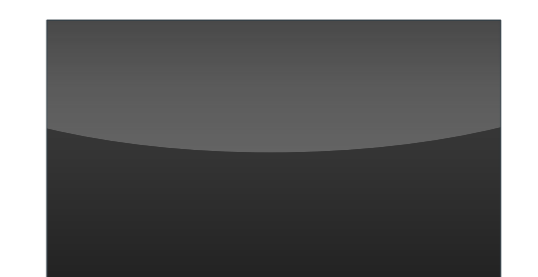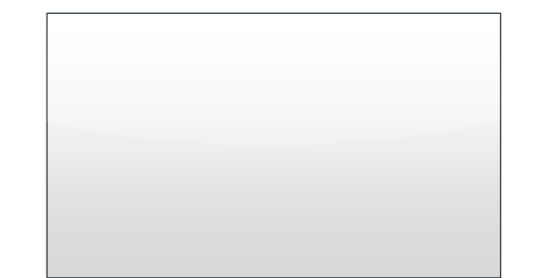

LOVATO N

MATERIALS:

white, grey or black polycarbonate body

MOUNTING:

surface on the ceiling

POWER SUPPLY:

self contained – 220-240 VAC / 50-60 Hz

central battery – 220-240 VAC / 50-60 Hz; 176-275 VDC

low voltage central battery – 24 VDC

LIGHT SOURCE:

1W power LED or 3W power LED

C - corridor lens; O - open area lens;

O 1W	120lm	C 1W	115lm
O 3W	250lm	C 3W	240lm

CHARGING:

max 12h; energy saving electronic impulse charger

AUTONOMY & BATTERIES:

1h, 2h or 3h; NiMH maintained-free batteries

INSULATION CLASS:

II

III – low voltage central battery

IP RATING:

IP41

AMBIENT TEMPERATURE:

t_a: 0°C – 40°C

OPTIONS:

AT – auto test; RS – RUBIC central monitoring;

CB – central battery; FZLV low voltage central battery;



ADDITIONAL INFO:

network power supply and battery charge LED indicator;

deep discharge protection;



SELECT COLOR:

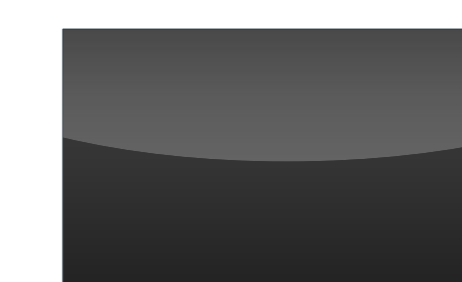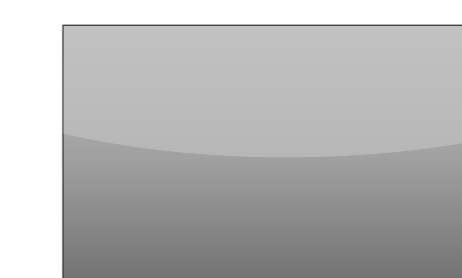

LOVATO N

MATERIALS:

white, grey or black polycarbonate body

MOUNTING:

surface on the ceiling

POWER SUPPLY:

self contained – 220-240 VAC / 50-60 Hz

central battery – 220-240 VAC / 50-60 Hz; 176-275 VDC

low voltage central battery – 24 VDC

LIGHT SOURCE:

1W power LED or 3W power LED

C - corridor lens; O - open area lens;

O 1W	120lm	C 1W	115lm
O 3W	250lm	C 3W	240lm

CHARGING:

max 12h; energy saving electronic impulse charger

AUTONOMY & BATTERIES:

1h, 2h or 3h; NiMH maintained-free batteries

INSULATION CLASS:

II

III – low voltage central battery

IP RATING:

IP41

AMBIENT TEMPERATURE:

t_a: 0°C – 40°C

OPTIONS:


AT – auto test; RS – RUBIC central monitoring;

CB – central battery; FZLV low voltage central battery;

ADDITIONAL INFO:

network power supply and battery charge LED indicator;

deep discharge protection;

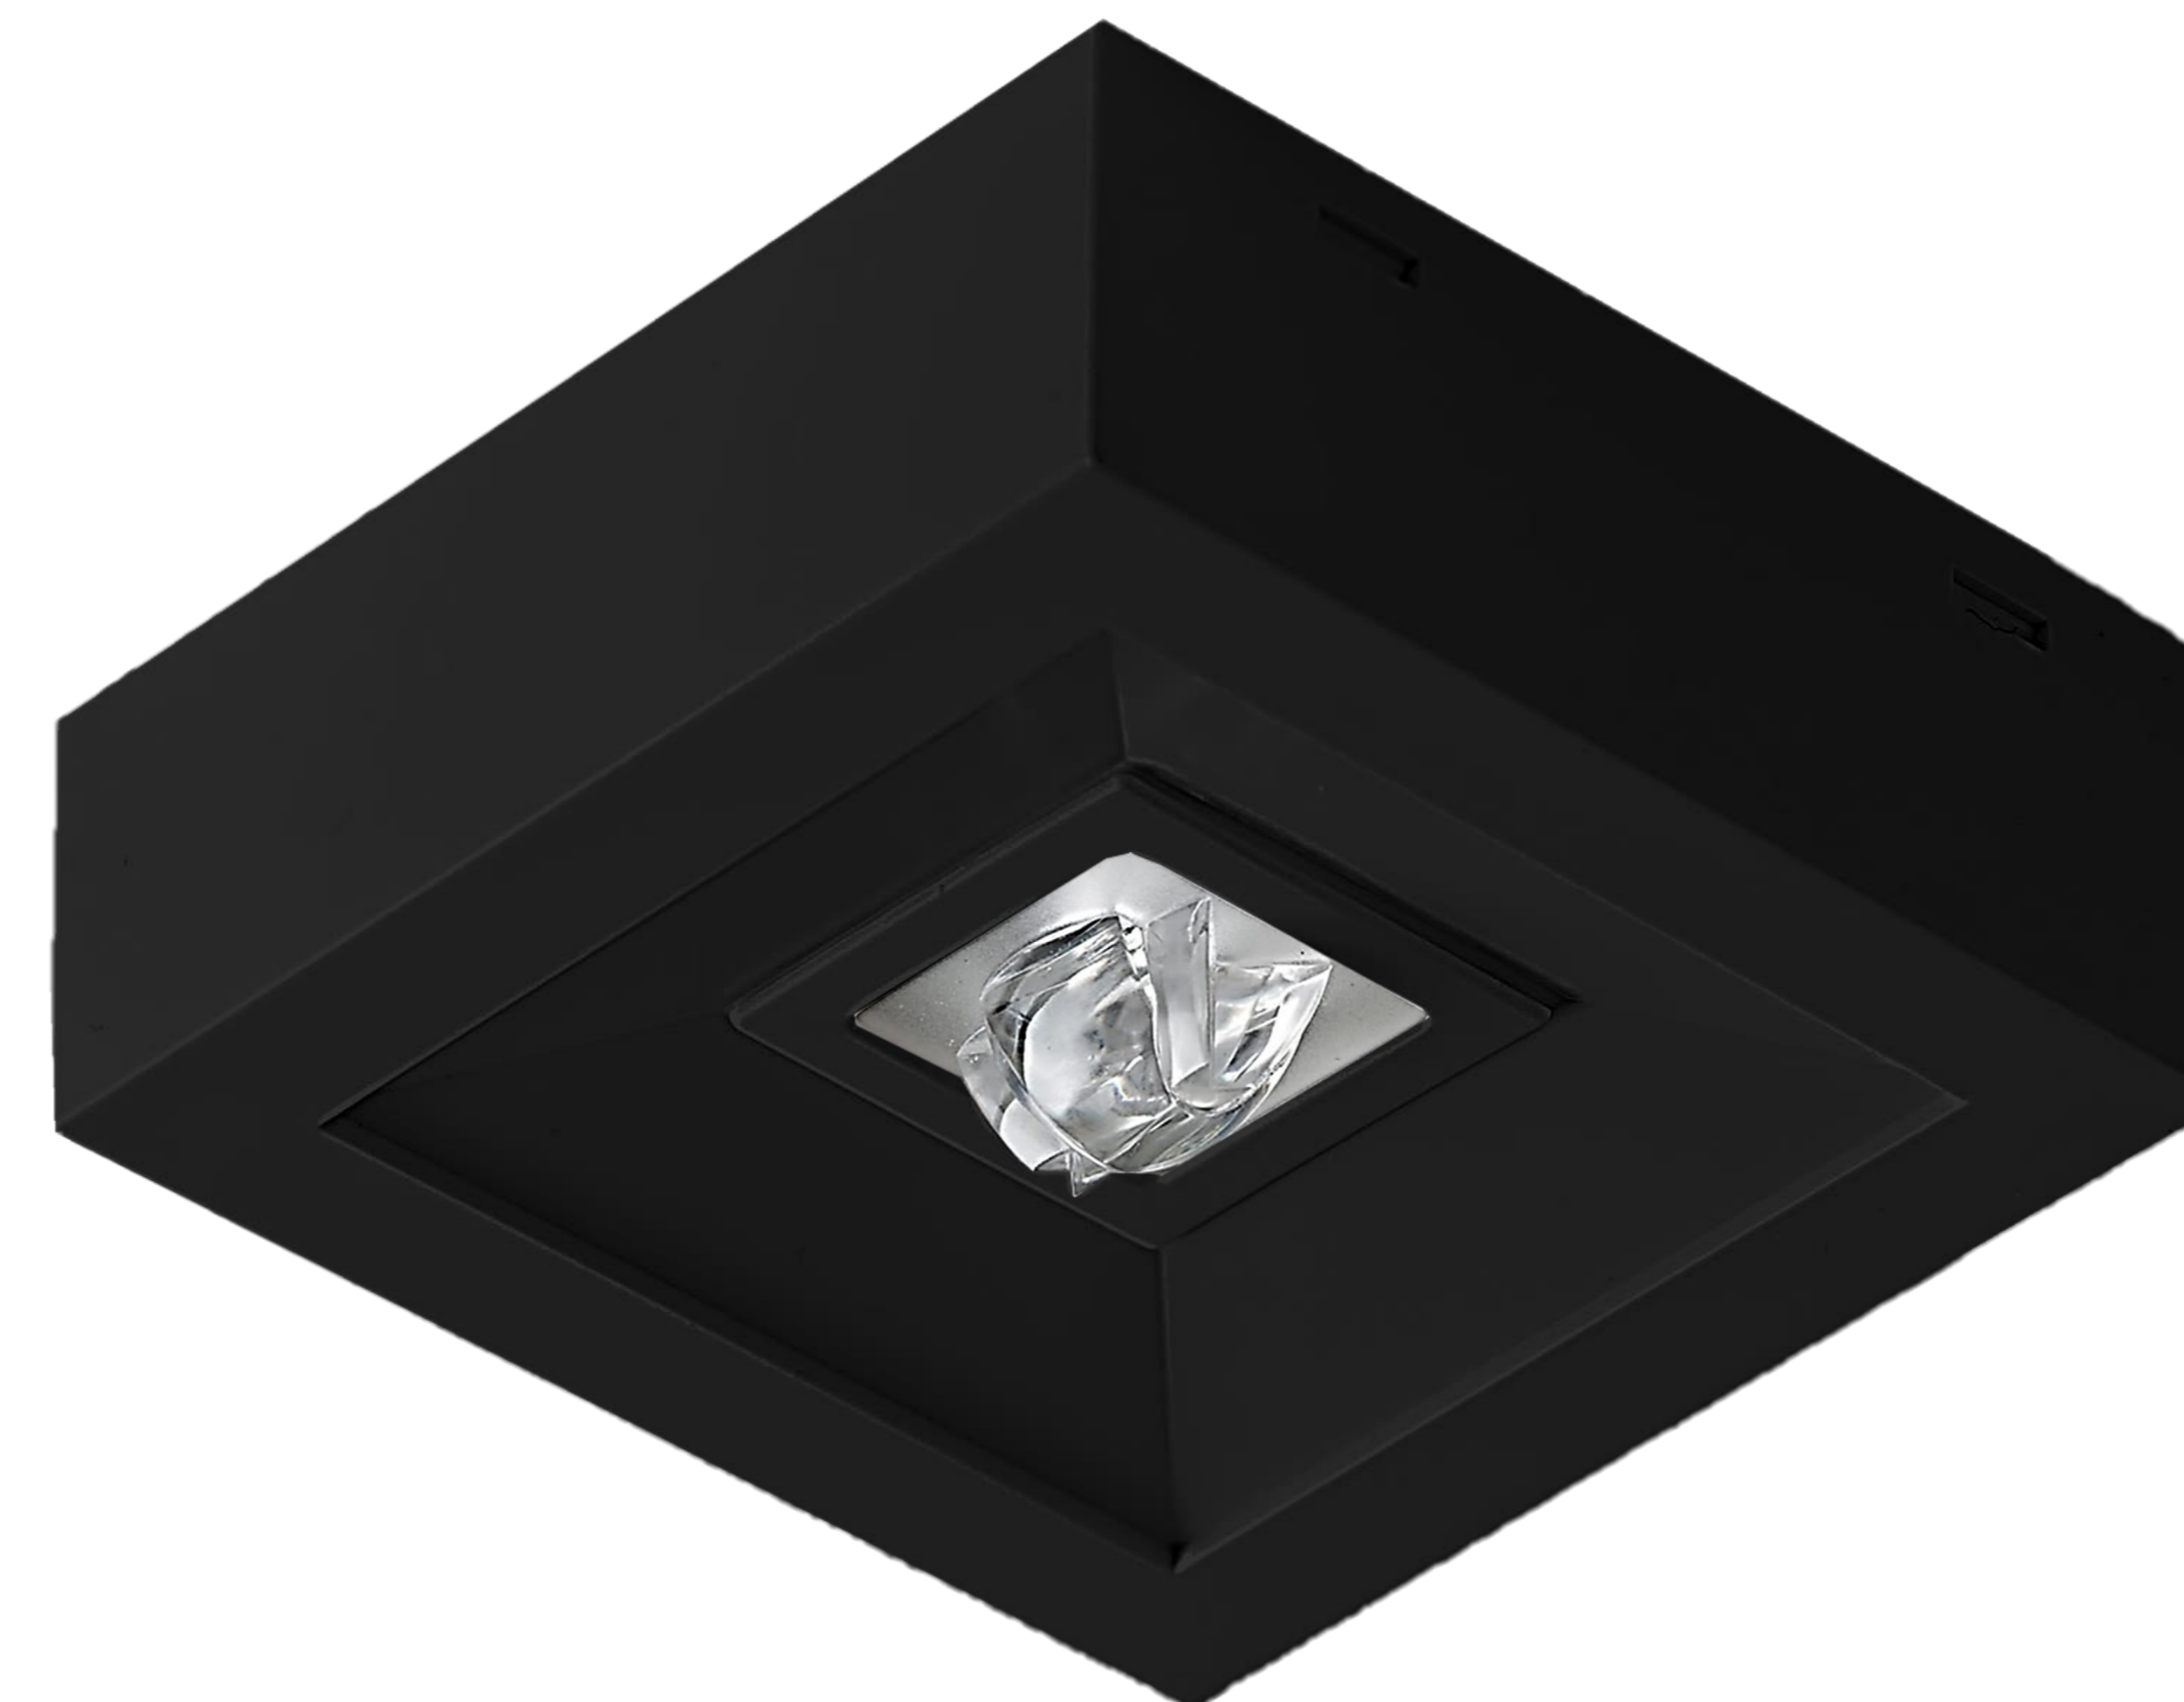

SELECT COLOR:

