


## Vaslista

Poz.	db	o	Egyes hossz	Teljes hossz	Tömeg
		[mm]	[m]	[m]	[kg]
1	184	12	3.90	717.60	637.23
2	92	12	5.00	460.00	408.48
3	16	12	0.96	15.36	13.64
4	16	12	1.80	28.80	25.57
5	380	10	2.25	855.00	527.54
6	33	8	1.42	46.86	18.51
7	33	8	1.78	58.74	23.20
8	102	12	1.50	153.00	135.86
9	376	10	1.48	556.48	343.35
10	21	12	1.50	31.50	27.97
11	6	12	2.20	13.20	11.72

A táblázat a betonfedés biztosításához szükséges távtartókat  
(S kampókat) NEM tartalmazza!

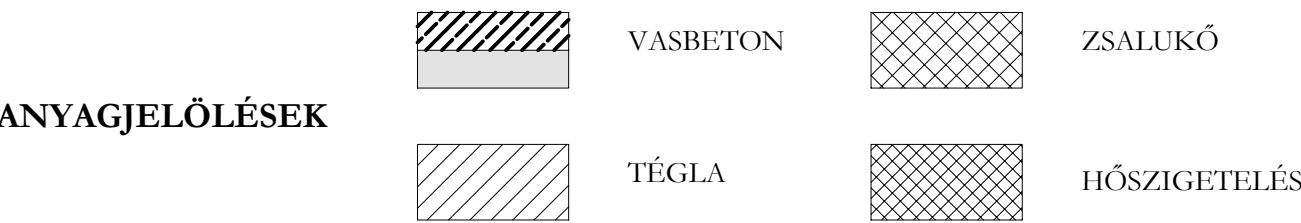

### Megjegyzések

Betonmínőség:  
- Vasbeton falak: C25/30-XC1-16-F2  
Betonacélminőség:  
- B60.50 (B500A)  
Betonotakarás: 25 mm (2,5 cm)  
A vasalási méretek külméretei:  
± 0/00 az építet burkoló földszinti padlóronalra!  
A terv együtt kezelendő az építész tervekkel és a csatlakozó kiviteli tervekkel!  
Egy keresztmetszetben a vasak maximum 50 % - a toldható!  
Toldási hosszak:  
ø8 - 50 cm  
ø10 - 65 cm  
ø12 - 75 cm

